

Datasheet

iCF 1IE2 series

- CF 6.0 standard compatible
- supporting PIO 0-6/UDMA 0-6 in True-IDE mode
- Write protection security
- Read disturb management
- Secure Erase
- iPowerGuard
- iDataGuard
- Support iSLC technology



Introduction

The Innodisk Industrial CompactFlash® 1IE2 Memory Card (iCF 1IE2) products provide high capacity solid-state flash memory that electrically complies with the True IDE Mode that is electrically compatible with an IDE disk drive. The original CF form factor card can be used in any system that has a CF slot.

Designed to replace traditional rotating disk drives, Innodisk Industrial CompactFlash® 1IE2 Memory Cards are embedded solid-state data storage systems for mobile computing and the industrial work place. The Industrial CompactFlash® features an extremely lightweight, reliable, low-profile form factor. Industrial CompactFlash® 1IE2 (iCF 1IE2) support advanced PIO (0-4), Ultra DMA (0-6) transfer mode, multi-sector transfers, and LBA addressing. Furthermore, the 1IE2 series support iPowerGuard with voltage power-down detection for full power-down robustness

iCF 1IE2 series

Drawing

Contact us for more information
about the iCF 1IE2

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan (R.O.C.)

Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com

+1-510-770-9421

Europe

eusales@innodisk.com

+31-40-3045-400

Japan

jpsales@innodisk.com

+81-3-6667-0161

China



sales_cn@innodisk.com

+86-755-21673689

www.innodisk.com

© 2021 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

20210818

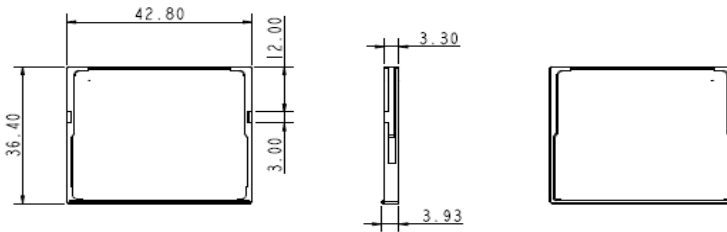

Specifications

Interface	PATA
Flash Type	iSLC
Capacity	4GB~128GB
Max. Channels	2
Sequential R/W (MB/sec, max.)	85/55
Max. Power Consumption	0.60 W
Thermal Sensor	√
H/W Write Protect	Optional*
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	42.8X 36.4 X 3.3 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -40°C ~ +85°C MTBF: 3 million hours

Ordering Information

Operation Temp.	4GB	8GB	16GB	32GB	64GB	128GB
Standard Grade (0°C ~ +70°C)	DHCFC-04GYA2BC1SC(W)	DHCFC-08GYA2BC1SC(W)	DHCFC-16GYA2BC1DC(W)	DHCFC-32GYA2BC1DC(W)	DHCFC-64GYA2BC1DC(W)	DHCFC-A28YA2BC1DC(W)
Industrial Grade (-40°C ~ +85°C)	DHCFC-04GYA2BW1SC(W)	DHCFC-08GYA2BW1SC(W)	DHCFC-16GYA2BW1DC(W)	DHCFC-32GYA2BW1DC(W)	DHCFC-64GYA2BW1DC(W)	DHCFC-A28YA2BW1DC(W)

*H/W write protect function is optional.

For the write protect demand, please place the order by PN: DHCFC-xxxYA2Bx1xCW

innodisk

www.innodisk.com